






# HUMBUCKER Series Wiring

(Standard Humbucker Sound)

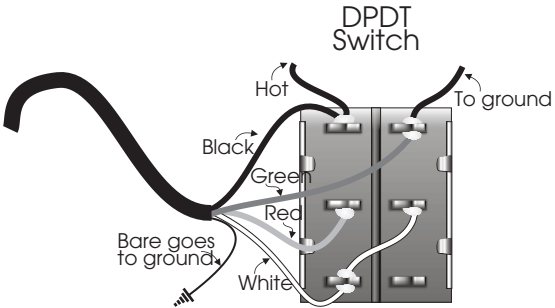

Optional:  
Series / Parallel Wiring  
(Allows you to independently run each coil to output for an acoustic-like tone. Use a DPDT push/pull pot or mini toggle switch.)

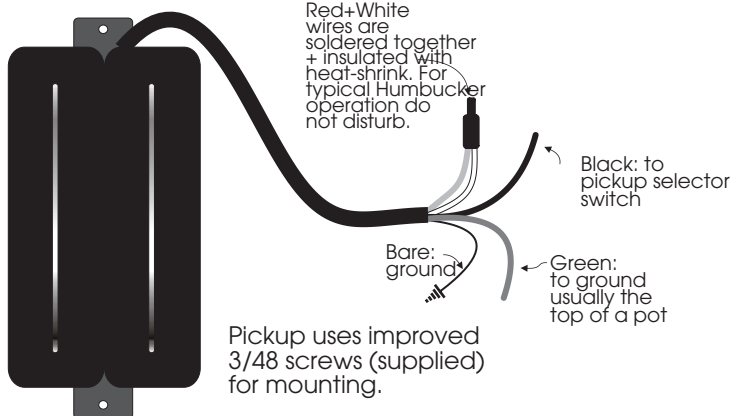

Height between string and pickup rails should be at 4-5/32" on the bass side and 2-3/32" on the treble side while string is fretted at higher frets.